


Ruggedization

Full Environmental Compliance

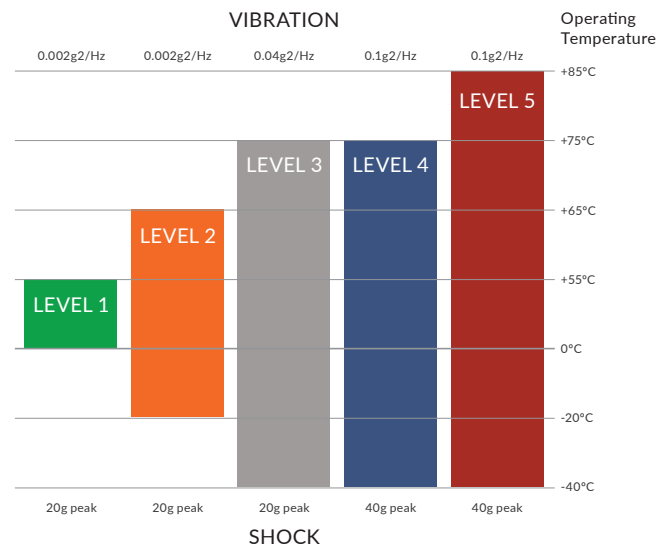

Abaco Systems was among the very first companies to bring to market commercial off-the-shelf (COTS) products that were rugged by design – as opposed to commercial products that were ruggedized as an afterthought. Created to operate in the harshest environments, Abaco’s products now reflect the company’s unparalleled experience and expertise in ruggedization, with its unique combination of design evaluation and assembly and test practices through to advanced thermal management, mechanical engineering and hermetic control techniques.

Abaco ruggedizes its products by upgrading or screening parts for extended temperatures, adding mechanical stiffening bars, and/or changing substrate materials for thermal conduction. An integrated stiffening frame/thermal management assembly is used to optimize the mechanical dynamic and thermal performance. A variety of conformal coatings are available for humidity and static control.

The wide range of harsh military, aerospace and industrial environments for which Abaco products are designed sees them built in five distinct ruggedization levels. Development

systems are compatible and interoperable with deployed systems through the use of shared circuit design and software compatibility, allowing the most cost-effective option to be selected: each of the five levels differ only in the mechanical build standard, type of cooling and the quality of the electronic components used.

Abaco’s five ruggedization levels offer increasing levels of environmental durability, enabling operational goals to be met at the lowest possible cost. Each ruggedization level has been carefully tailored to provide the optimal trade-off between cost, performance and reliability. Selection will depend on the type of cooling required – either forced air or by conduction – and the overall requirements for environmental performance.

Fully compliant with the ANSI/VITA 1-1994 VMEbus and IEEE Std 1101.2-1992 conduction-cooled specifications, Abaco products can be used with complete confidence in conjunction with both in-house designs and other vendor products that meet the same internationally recognized standards.

FEATURES:

- Unique expertise/experience in ruggedization
- Products designed to be rugged
- Five levels of ruggedization available
- Compliant with all relevant standards, including:
 - ANSI/VITA 1.1-1997
 - ANSI/VITA 20-2001
 - ANSI/VITA 30.2-2002
 - PICMG 2.0 R3.0-1999
 - IEEE 1101.2-1992
- All build levels compatible, interoperable

Ruggedization Full Environmental Compliance

Summary

Ruggedization Level 1 Standard (Air-cooled)	
Operating Temperature	0 to +55°C with 300 linear ft./min. airflow
Storage Temperature	-50 to +100°C
Vibration	0.002g/Hz from 10 to 2000Hz random and 2g sinusoidal from 5 to 500Hz
Shock	20g peak sawtooth, 11mS duration
Humidity	Up to 95% RH
Notes: Commercial grade, for use in benign environments and software development applications.	

Ruggedization Level 2 Extended Temperature (Air-cooled)	
Operating Temperature	-20 to +65°C with 300 linear ft./min. airflow
Storage Temperature	-50 to +100°C
Vibration	0.002g2/Hz from 10 to 2000Hz random and 2g sinusoidal from 5 to 500Hz
Shock	20g peak sawtooth, 11mS duration
Humidity	Up to 95% RH with varying temperature, 10 cycles, 240 hours
Notes: Similar to standard, conformally-coated for added protection and temperature characterized.	

Ruggedization Level 3 Rugged (Air-cooled)	
Operating Temperature	-40 to +75°C with 600 linear ft./min. airflow
Storage Temperature	-50 to +100°C
Vibration	0.04g2/Hz 20 to 2000Hz, with a flat response to 1000Hz, 6dB/octave roll-off from 1000 to 2000Hz
Shock	20g peak saw tooth, 11mS duration
Humidity	Up to 95% RH with varying temperature, 10 cycles, 240 hours
Notes: Wide temperature, conformally-coated for added protection. Optional Environment Stress Screening (ESS).	

Ruggedization Level 4 Rugged (Conduction-cooled)	
Operating Temperature	-40 to +75°C at the thermal interface
Storage Temperature	-50 to +100°C
Vibration	Random, 0.1g2/Hz from 15 to 2000Hz per MIL-STD-810E Fig 514.4 - 8 for high performance aircraft. ~12g RMS
Shock	40g peak saw tooth, 11mS duration
Humidity	Up to 95% RH with varying temperature, 10 cycles, 240 hours
Notes: Designed for severe environment applications with high levels of shock and vibration, small space envelope and restricted cooling. Optional Environment Stress Screening (ESS).	

Ruggedization Level 5 Rugged (Conduction-cooled)	
Operating Temperature	-40 to +85°C at the thermal interface
Storage Temperature	-50 to +100°C
Vibration	Random, 0.1g2/Hz from 15 to 2000Hz per MIL-STD-810E Fig 514.4 - 8 for high performance aircraft. ~12g RMS
Shock	40g peak saw tooth, 11mS duration
Humidity	Up to 95% RH with varying temperature, 10 cycles, 240 hours
Notes: Designed for severe environment applications with high levels of shock and vibration, small space envelope and restricted cooling. Optional Environment Stress Screening (ESS).	

Ruggedization Levels A to E

Abaco Systems has also introduced Ruggedization Levels A to E which are identical in every respect to Ruggedization Levels 1 to 5 except that the upper operating temperature limits are defined on a product by product basis. This allows Abaco to offer the very highest performance products without the restrictions of fixed upper temperature limits. For products rated under this scheme the upper temperature limit is defined in the product manual.


Level A = Level 1 : except Operating Temperature = 0 to X°C (consult manual for X)

Level B = Level 2 : except Operating Temperature = -20 to X°C (consult manual for X)

Level C = Level 3 : except Operating Temperature = -40 to X°C (consult manual for X)

Level D = Level 4 : except Operating Temperature = -40 to X°C (consult manual for X)

Level E = Level 5 : except Operating Temperature = -40 to X°C (consult manual for X)

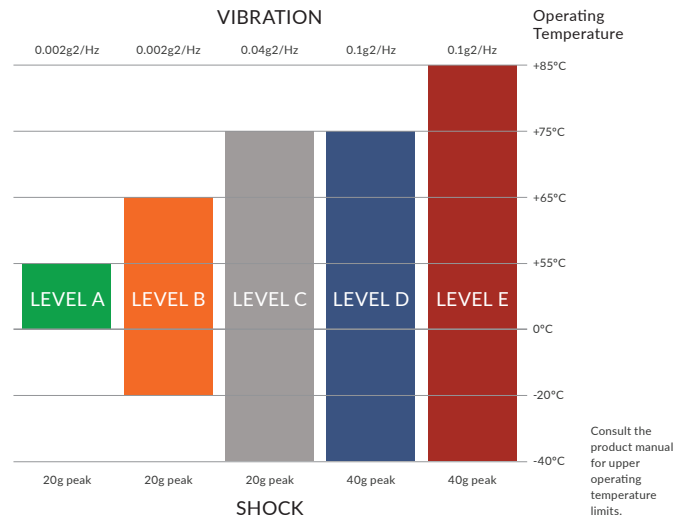

WE INNOVATE. WE DELIVER. YOU SUCCEED.

Americas: 866-OK-ABACO or +1-866-652-2226 Asia & Oceania: +81-3-5544-3973

Europe, Africa, & Middle East: +44 (0) 1327-359444

Locate an Abaco Systems Sales Representative visit: abaco.com/products/sales

abaco.com @AbacoSys

©2016 Abaco Systems. All Rights Reserved. All other brands, names or trademarks are property of their respective owners. Specifications are subject to change without notice.

