



os4300

Non-Metallic Temperature Sensor


The os4300 Non-metallic Temperature Sensors are housed within a sealed, alumina ceramic tube that are designed to make handling easy and sensor installation fast and repeatable. It is based on fiber Bragg grating (FBG) technology and since there are no epoxies holding the fiber to the tube, long term stability is ensured by design.

In side by side comparisons with conventional thermocouples, the os4300 is equally sensitive and accurate, while providing sub-second response time, wider operating range, no calibration, and no EMI noise. The os4300 temperature sensor is qualified for use in harsh environments and delivers the many advantages inherent to all FBG based sensors.

Three packaging options provide for installation that mimics that of conventional thermocouples with armored cables and protected connectors, and small sensors that provide the user with both installation flexibility and sub second thermal response.

This sensor can be used alone or in series as part of an FBG sensor array. Installation and cabling for such arrays is much less expensive and cumbersome than comparable electronic gage networks. With each sensor, Micron Optics provides a Sensor Information Sheet listing the calibration coefficients needed to convert wavelength information into temperature. Micron Optics' ENLIGHT Sensing Software provides a utility to calculate and then record, display, and transmit data for large networks of sensors.

The os4300s are three versions of a temperature sensor based on fiber Bragg grating (FBG) technology housed within a non-metallic tube.

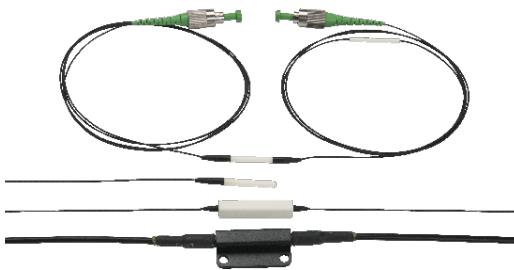

Key Features

Fast response time

Qualified to same rigorous standards used for comparable electronic gages.

Non-metallic construction

Fast, simple, repeatable installation.

Armored fiber cable weldable package and rugged sensor package.

Connector protection fittings available for harsh environments.

Several package options for field applications.

Calibrated for high absolute accuracy.

Double ended design supports multiplexing of many sensors on one fiber

Micron Optics' patented micro opto-mechanical technology.

Included in ENLIGHT's sensor templates - allows for quick and easy optical to mechanical conversions.

Applications

Structures (bridges, dams, tunnels, mines, buildings, oil platforms)

Energy (wind turbines, oil wells, pipelines, nuclear reactors, generators)

Transportation (railways, trains, roadways, specialty vehicles, cranes)

Marine vessels (hull, deck, cargo containers)

Aerospace (airframes, composite structures, wind tunnels, static and dynamic tests)

Properties

Thermal Properties	os4310 Non-metallic	os4330 Non-metallic Epoxy Mount	os4350 Armored Cable, Flange Mount
Operating Temperature Range ¹		-40 to 120°C	
Temperature Sensitivity		~10pm/°C ($\pm 1.7\text{pm}/^{\circ}\text{C}$)	
Cable Temperature Range		-40 to 250°C (FC/APC Connectors: -40 to 80°C)	
Response Time	0.7 seconds	4.6 seconds	4.2 seconds
Standard Calibration ³ (Included)		1.0°C Long Term Accuracy ⁴ 0.6°C Short-Term Accuracy, Typical ⁵	
Premium Calibration ³ (Optional)		0.5°C Long Term Accuracy ⁴ 0.2°C Short-Term Accuracy, Typical ⁵	
Physical Properties			
Dimensions (L x W x H)	18.8 x 3.2 x 3.2 mm	31.8 x 7.6 x 7.6 mm	31.5 x 15.0 x 7.6 mm
Weight (Including Cable)	2.6g	4.3g	38g
Housing Material	Alumina	Alumina	Anodized Aluminum
Cable Length		1 m ($\pm 10\text{ cm}$)	
Filter Type		SMF28-Compatible	
Cable Bend Radius		$\geq 17\text{ mm}$	
Cable Type	1mm Fiberglass Braid	1mm Fiberglass Braid	3mm Armored Cable
FC/APC Connector	Optional	Optional	Both Connector and Protection Fittings Optional
Fastening Methods	Bond Strain Reliefs Only	Epoxy Type	#6 Self Drilling Screws or Epoxy
Optical Properties			
Peak Reflectivity (Rmax)		> 70%	
FWHM (- 3 dB point)		0.25 nm ($\pm .05\text{ nm}$)	
Isolation		> 15 dB (@ $\pm .4\text{ nm}$ around center wavelength)	

Ordering Information

os3600-ggg-tttt/ssss-1xx-1yy

aa	Model
10	Non-metallic
30	Non-metallic, Epoxy Mount
50	Armored Cable, Flange Mount (only with FC option)
wwww	Wavelengths (+/- 1nm) Standard - 1460 to 1620 nm in 4 nm intervals
xx	Termination type 1xx Cable 1, Length & Connector 1 1 m Standard, Cable Length UT Underminated FC FC/APC Connector PF FC/APC Connector with Protection Fitting
yy	Termination type 1yy Cable 2, Length & Connector 1 1 m Standard, Cable Length 00 Single Ended Sensor (Available only for os4310) UT Underminated FC FC/APC Connector PF FC/APC Connector with Protection Fitting
z	Calibration Method S Standard Calibration P Premium Calibration

Notes

- 70 to 275°C available on the single ended os4310.
- Time to reach 63% of total temperature drop in water (100°C).
- Absolute accuracy of sensor is dependent on capability of interrogation instrument.
- Based on 120°C soak for 1,000 hours.
- Four (4) thermal cycles from min to max temperature.
Max

Ordering Information Example

os4330-1560-1FC-1FC-S



+1.866.586.2682
solutions@lunainc.com
www.lunainc.com